

AVES®

AV-N95 CARBON with Valve

Article No.: 2760FT447

The N95 Particulate Respirator offers reliable protection against non-toxic aerosols, dust, and particles. Designed for maximum comfort and safety, it is suitable for non-toxic dust environments in various industries.



STYLE & DESIGN

- **Polypropylene Outer Shell** for durability and lightweight comfort.
- **Smooth Lining and Sweat Absorbent** for extended wear comfort.
- **Bendable Nose Piece with Inner Nose Foam** for a snug and secure fit.
- **Welded Elastic Strap and Welded Edge Seal** ensure durability and a secure fit.
- **Lightweight and Comfortable** for easy breathing during long use.

SIZE & PACKING

- **Size:** One Size
- **Color:** White
- **Packing:** 20 masks per box, 20 boxes per carton
- **Origin:** China

ACTIVE CARBON

WELDED EDGE SEAL



Aluminum nose clip



Elastic head strap



Cup shape

Accommodates a wide range of safety equipment, including eye, ear, & face protection.



Recommended Applications: Includes welding, sanding, sweeping, bagging, grinding and other operations that create dust. Uses would also include solids such as those from oil & petrochemical industries, textile industry, chemicals industry, surface preparation, food preparation & handling, woodworking, grain handling and milling, process of minerals and other substances.

It can prevent harmful pollutants such as nonferrous metals, heavy metals...etc, and separate harmful material such as glass fiber, asbestos...etc.

Doc. Control:	Rev.: 3.2	Date: April 6, 2016
---------------	-----------	---------------------


This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT RP 4065-3.2



AVES®

AV-N95 CARBON with Valve

Article No.: 2760AV447

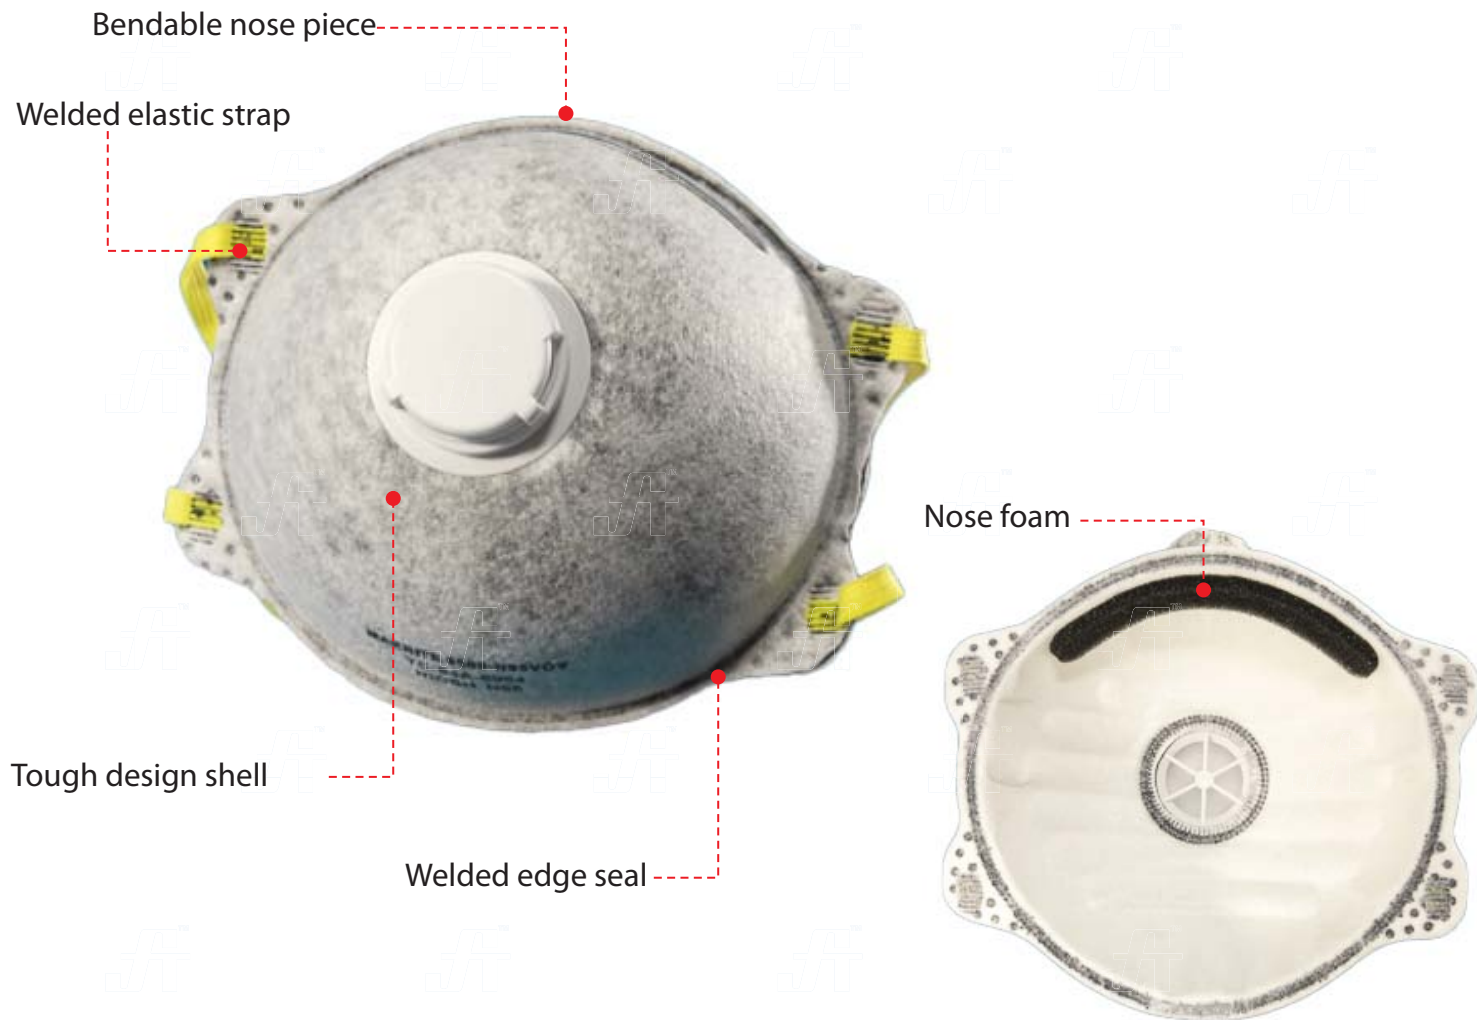

LIMITATIONS

USE FOR

- Use for solid particulates and liquid mists in concentrations not exceeding 10X PEL/OEL
- Use for oil based particles from sprays that do not also emit harmful vapors.
- Use for nuisance levels of organic vapors such as solvents, degreasers, and/or resins.
- †Nuisance level refers to concentrations not exceeding OSHA PEL or applicable occupational exposure limit whichever is lower.
- Always follow User Instructions and use in manners as indicated

DO NOT USE FOR

- DO NOT use for gases and vapors, asbestos, arsenic, cadmium, lead, 4,4-methylene dianiline (MDA), or abrasiveblasting
- DO NOT use for particulate concentrations exceeding 10X PEL/OEL
- DO NOT use in any manner not indicated in the User Instructions

NOTE: **MAC** = Maximum Admissible Concentration
TLV = Threshold Limit Value

OEL = Occupational Exposure Limit
APF = Assigned Protection Factor

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT RP 4065-3.2

Doc. Control:	Rev.:	Date:
	3.2	April 6, 2016

