

AVES®

AV-R95 WITH CARBON

Article No.: 2760AV446

AVES® AV-R95 cup shape filtering facepiece provides effective respiratory protection in industrial environments. It offers greater than 95% filter efficiency against oil and non-oil based particulate aerosols.



ACTIVE CARBON



WELDED EDGE SEAL



Aluminum nose clip



Elastic head strap



Cup shape

DESCRIPTION

- For Nuisance Organic Vapors
- Carbon layer for effective filtering
- Made with a layer of activated carbon for nuisance odor relief
- Individually adjustable aluminum nose clip for excellent fit
- Oil resistant material
- Ultrasonic welded head-straps for secure seal
- Light grey color
- Standard size
- Packing: 10pcs/box, 12 boxes/carton

STANDARDS

NIOSH Approved R95



Accommodates a wide range of safety equipment, including eye, ear, & face protection.



Recommended Applications: Includes welding, sanding, sweeping, bagging, grinding and other operations that create dust. Uses would also include solids such as those from oil & petrochemical industries, textile industry, chemicals industry, surface preparation, food preparation & handling, woodworking, grain handling and milling, process of minerals and other substances.

It can prevent harmful pollutants such as nonferrous metals, heavy metals...etc, and separate harmful material such as glass fiber, asbestos...etc.

Doc. Control:	Rev.: 3.2	Date: April 6, 2016
---------------	-----------	---------------------


This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT RP 4065-3.2



AVES®

AVES® R95 WITH CARBON

Article No.: 2760AV446

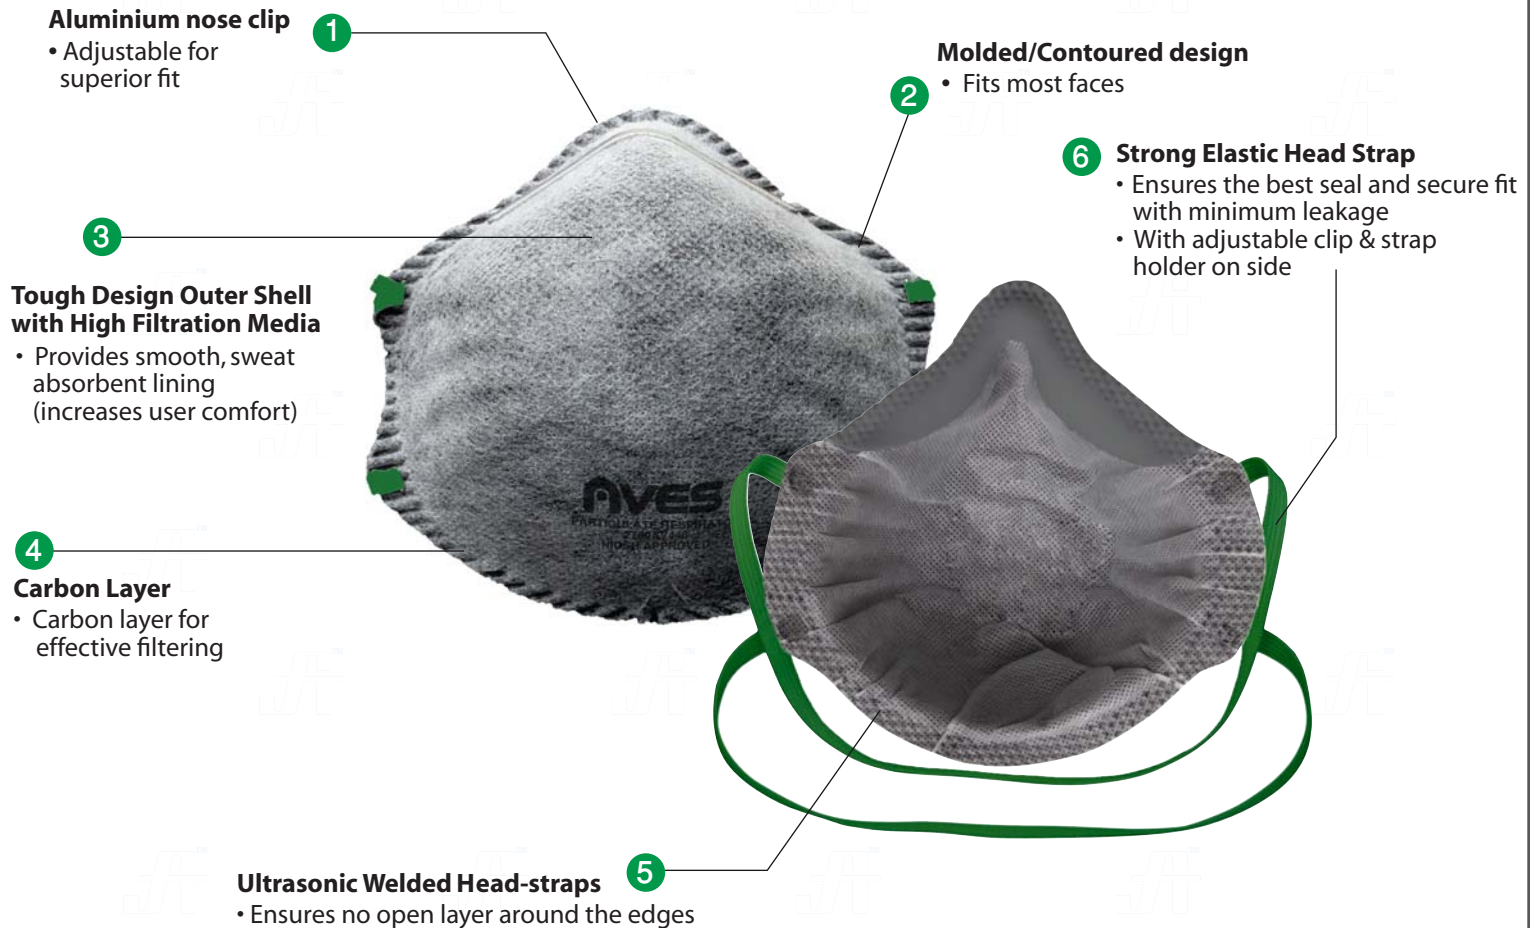

LIMITATIONS

USE FOR

- Use for solid particulates and liquid mists in concentrations not exceeding 10X PEL/OEL
- Use for oil based particles from sprays that do not also emit harmful vapors.
- Use for nuisance levels of organic vapors such as solvents, degreasers, and/or resins.
†Nuisance level refers to concentrations not exceeding OSHA PEL or applicable occupational exposure limit whichever is lower.
- Always follow User Instructions and use in manners as indicated

DO NOT USE FOR

- DO NOT use for gases and vapors, asbestos, arsenic, cadmium, lead, 4,4-methylene dianiline (MDA), or abrasiveblasting
- DO NOT use for particulate concentrations exceeding 10X PEL/OEL
- DO NOT use in any manner not indicated in the User Instructions

NOTE: **MAC** = Maximum Admissible Concentration
TLV = Threshold Limit Value

OEL = Occupational Exposure Limit
APF = Assigned Protection Factor

Doc. Control:	Rev.: 3.2	Date: April 6, 2016
---------------	-----------	---------------------

This Article Data Sheet (ADS) is designed and produced by FLOWTRONIX (FT) covered under the intellectual property law. Any reproduction in whole or in part is strictly prohibited without written approval. FT RP 4065-3.2

